

12V 630Ah Battery

GTX Series



CAT # GTX12V630A-E2112-CS200



KEY BENEFITS

- + **Internal NeverDie® Battery Management System:** Integrated Smart BMS technology continuously monitors and protects to maximize battery lifespan
- + **Cell-Level Safety:** Premium matched Lithium Iron Phosphate (LiFePO₄) Cells optimized for safety and long cycle life
- + **Bluetooth® Connectivity:** Allows real-time monitoring, diagnostics, and updates via the Lithionics Bluetooth® App

Reliable Power, Unmatched Versatility

Our batteries feature easy expandability for extended run times and deliver dependable performance, even in extreme temperatures.

Battery Details



630Ah at 12.8V
8,064 Watt-Hours



UL 1973 Certified
for Motive Applications¹

DIMENSIONS

Size (L x W x H)	20.4" x 12.0" x 10.7"	518.2mm x 304.8mm x 271.8mm
Weight	128.0lbs	58.0kg

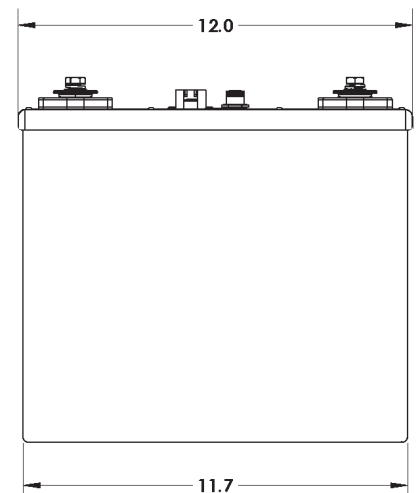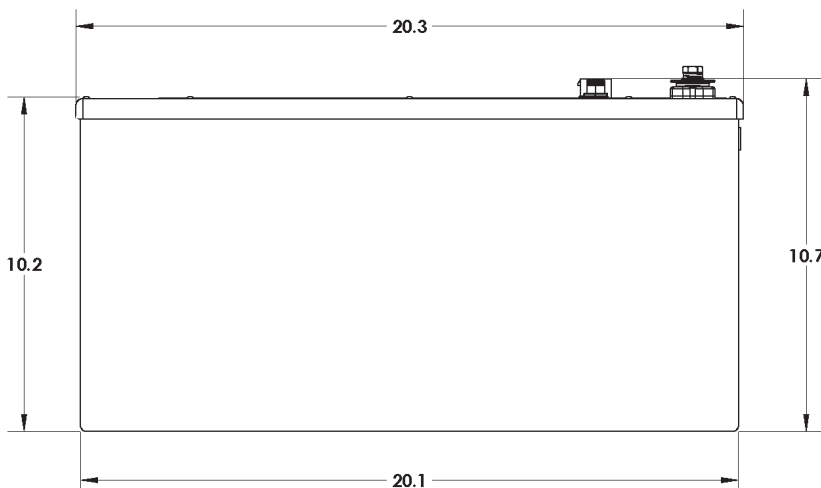

SPECIFICATIONS

NOMINAL VOLTAGE AND CAPACITY

12.8V 630Ah 8,064Wh

SHIPPING

UN3480, Class 9

CERTIFICATIONS

UNDOT	UN38.3
UL	UL1973 (battery assembly), UL1642, UL1973 (cells)

INTERNAL HEATER

Power Rating	70W
Thermostat On/Off (Internal)	<37°F (3°C) On, >41°F (5°C) Off

MECHANICAL

Mounting Orientation	Upright position only (black lid up)
Enclosure Material	0.09"Aluminum 5052
Enclosure Corrosion Protection	Iridite Chromate Conversion Coating + Powdercoat Paint
Ingress Protection	IP66

STORAGE

Refer to the Lithionics® Website for the Storage Procedure

ELECTRICAL

Internal Resistance	<3mΩ
Coulombic Efficiency	99%
Self-Discharge Rate (per month)	<3%
Cell Type	LiFePO ₄ Prismatic Cells
Power Connection	Copper Terminals, Nickel Plate, M8-1.25 Female Threads
Series Connection	Not Supported

CHARGE

Charge Voltage	14.4V ±0.2V
Operating Temperature Range	32°F (0°C) to 140°F (60°C) (Ambient -4°F (-20°C) with Heater Power)
Recommended Charge Current	<150A
Float Voltage	13.6V ±0.2V
Max Charge Current ³	<200A

DISCHARGE

Operating Voltage Range	10.8V to 14.4V ±0.2V
Operating Temperature Range	-4°F (-20°C) to 140°F (60°C)
Recommended Discharge Current	<150A
Max Discharge Current ^{2 3}	<230A
Pulse Current (1 second)	<1,200A
Low Cut-Off Voltage	10.8V ±0.2V
Reserve Voltage Cut-Off	12V ±0.2V

1. UL 1973 Certified: Battery is UL 1973 Certified when used with external circuit breaker and ampseal connector.
2. Inverter compatibility: up to 3,000W. For inverters exceeding 3,000W, consider an external Battery Management System (BMS) for higher performance.
3. Maximum charging and discharging rates dependent upon the ambient temperature and usage. UL1973 testing: Maximum charge and discharge currents were tested at 25°C/77°F

Powering Innovation.

Discover the right lithium replacement system for you. Reach out to Lithionics' expert support team to find your perfect power solution.

DS-004